*KEHS, BRANDT, BROMBORSKY and

LASCHE

THE GENERATION OF GIGAWATT POWER LEVELS OF MICROWAVE RADIATION

R. ALAN KEHS, MR.
HOWARD E. BRANDT, DR.
ALAN BROMBORSKY, MR.
GEORGE LASCHE, CAPT, USA
U.S. ARMY ELECTRONICS RESEARCH AND DEVELOPMENT COMMAND
HARRY DIAMOND LABORATORIES
ADELPHI, MD 20783

JUN 80

Introduction

Recent dramatic increases in the ability to produce ultrahigh power bursts of microwave radiation[1] both in the United States and in the Soviet Union are causing a complete reevaluation of our use of electronic systems on the battlefield and the susceptibility of current devices to new forms of electronic warfare. At the Harry Diamond Laboratories, a reflex triode has been used to produce peak powers as high as 3 GW in the X-band. Although this device was originally developed as an ion source,[2,3] the oscillating dipole motion of the electrons makes it an obvious candidate for a source of electromagnetic radiation. A fully relativistic, time-dependent, one-dimensional simulation code was written to investigate these collective oscillations and to predict the microwave energy spectral density.

The Experiment

The basic geometry of the triode is shown in figure 1. When connected to the FX-45 Flash X-Ray machine at the Harry Diamond Laboratories,[4] the carbon cathode delivers 20 kA average current during a 25 ns wide pulsed accelerating potential of 1 MV peak. The anode is a 6.4 m thick aluminized Mylar film located 1 cm from the emission cathode. To keep the random energy and self-fields of the electrons from blowing up the beam (radially), a slow pulsed magnetic field of variable (0 to 4 kG) peak amplitude was applied along the axis of the triode. The final section of the vacuum coaxial line and

Figure 1. Reflex Triode Attached to FX-45 Pulse Time.

the cathode support structure were fabricated from copper clad G10
circuit board to maximize the intensity of the applied magnetic field
and minimize the eddy current losses. The cathode diameter was 5 cm,
the cathode-ground plane gap was 10.5 cm, and the anode-cathode gap
was 1 cm.

The placement of the microwave diagnostics is shown in figure
2. X-band and Ku-band waveguides were used to carry signals to the
detection apparatus. For radiation perpendicular to the triode axis,
both horizontal and vertical polarizations were recorded by inserting
and removing twists in the waveguide. Radiation parallel to the
triode axis also was measured. Crystal detectors were used to
determine power magnitudes, and long dispersive waveguides were used
to examine the frequency content of the radiation.
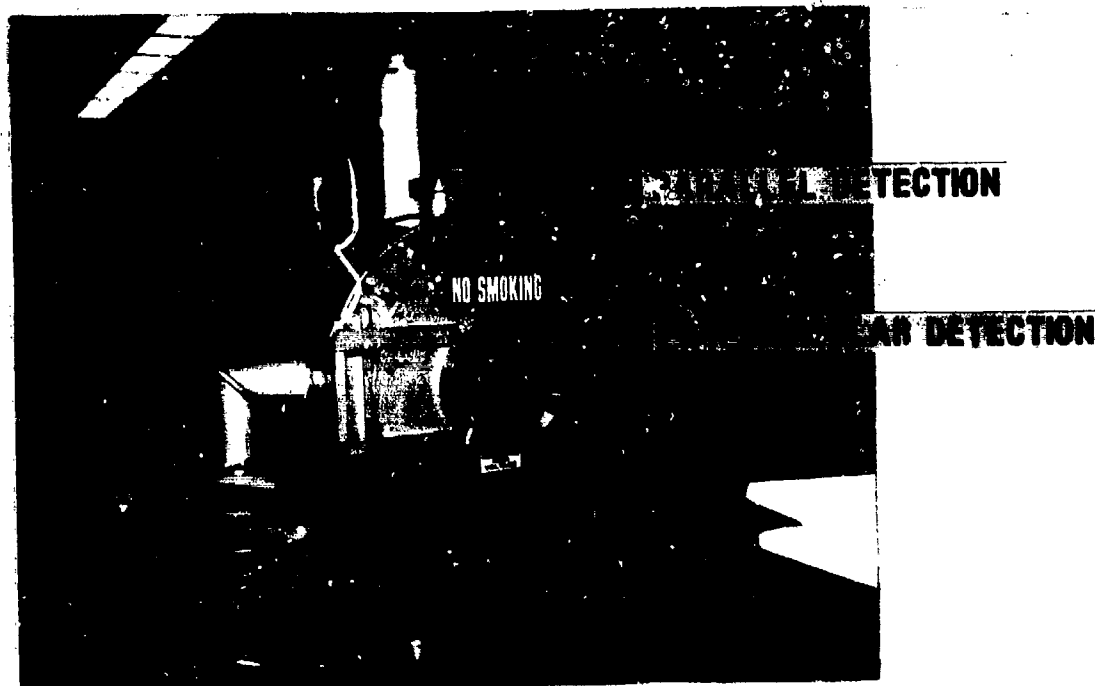
*KEHS, BRANDT, BROMBORSKY and
LASCHE

Figure 2.   The Reflex Triode Vacuum Chamber with
Microwave Diagnostics in Place.

Theory of Operation

The actual operation of the reflex triode is demonstrated by the
particle trajectory shown in figure 3. As current from the cathode
flows through the anode, space charge effects lead to the formation
of charge bunches. These charge bunches reflect the electrons, and
give rise to multiple modes of oscillation about the anode. The
resultant space charge oscillations are similar to the Barkhausen
oscillations that were observed in the early radio tubes of the
1920's.[5] These waves have a rich frequency content in which the
dominant modes are determined by gap spacing, gap voltage, and
applied magnetic field.

To gain insight into the parameters that affect microwave
radiation from a reflex triode, a computer simulation of the electron
motion was undertaken.[6] Based on a relativistic extension of the
techniques used by Birdsall and Bridges,[7] the code used superparticle

341
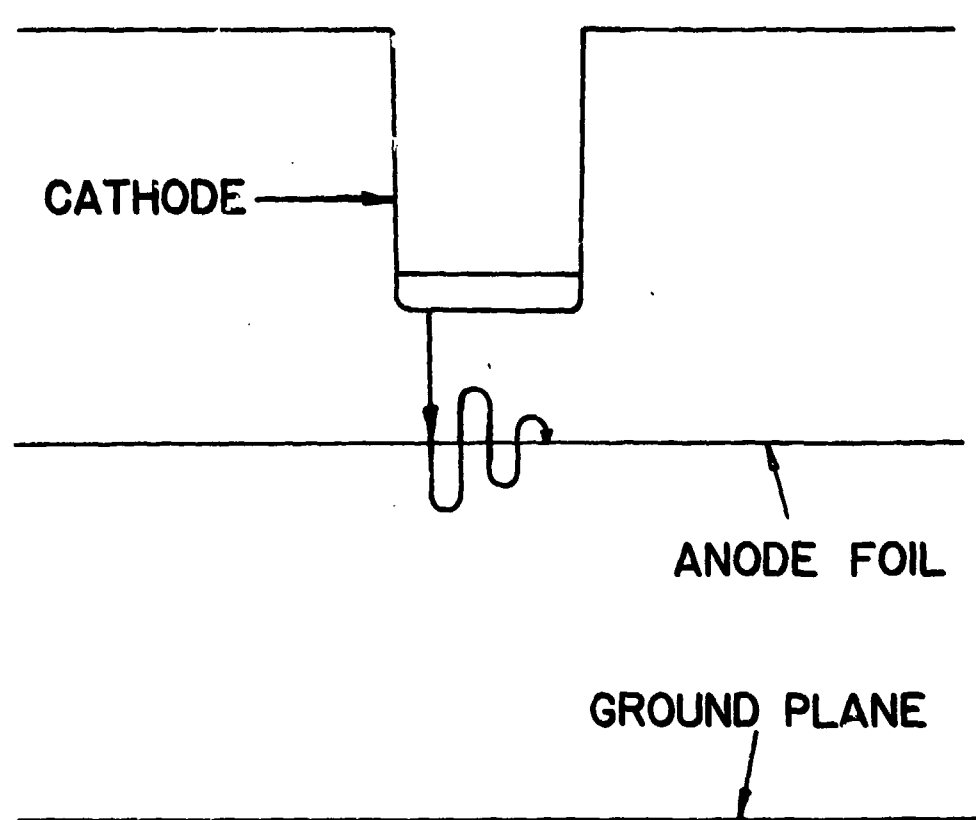
*KEHS, BRANDT, BROMBORSKY and
LASCHE

Figure 3. A Particle Trajectory in the Reflex Triode.

342

*KEHS, BRANDT, BROMBORSKY and
LASCHE

space charge sheets to represent the flow of charge in the triode.
It was found that seven parameters completely define the electron
dynamics of a reflex triode simulation run. The three geometric
parameters are the distances from the anode to the near and far
cathodes (shown as a ground plane in figure 3) and the area of the
emitting cathode. The machine parameter is the waveform of the
voltage applied to the anode-cathode gap as a function of time. The
material parameter is the stopping power of the anode foil as a
function of electron energy. The two internal code simulation
parameters are the time step between electric field calculations and
particle pushes and the available current for injection into the
anode-cathode region. Time steps are chosen to be a small fraction
of an anode-cathode light transit time. Typically, a time step of
0.26 ps is used, giving a Nyquist cutoff frequency of 2000 GHz.

The simulation results show that, at the onset of the voltage
pulse across the anode-cathode gap, electrons are explosively pulled
out of the cathode plasma and fill the triode region. The total
space charge, however, does not monotonically increase but oscillates
in time while rising to a saturated time averaged total charge.
Electrons entering the gap with favorable phase relative to the given
frequency component of the resultant space charge fields give up
energy to the fields and remain in the triode region, while those
with unfavorable phase will gain energy from the fields and are
ejected from the triode region. Favorably phased electrons tend to
be grouped together spatially since they enter at nearly the same
time. Also, space charge periodically limits the subsequent entrance
of electrons at the emission cathode. These mechanisms give rise to
electron space charge bunching. While the electron bunches oscillate
back and forth about the anode, they also interact with one another
ejecting and capturing electrons from one another and thereby
depleting and growing in size. This behavior is similar to strong
Langmuir turbulence in a relativistic electron plasma.

Once the triode has been saturated, the total charge oscillates
about the mean value. A spatially fluctuating virtual cathode forms
on the far side of the anode at a time averaged distance
approximately equal to the anode-cathode gap. Transient bunching
mechanisms lead to high frequency oscillations about the anode.
Spectral analysis of these space charge oscillations reveals a broad
spectrum of peaks in the gigahertz regime separated by 0.2 to 0.4 GHz
and peaking at 10 GHz.

The actual spectral density of the emitted radiation was
computed in the far field dipole approximation by using the
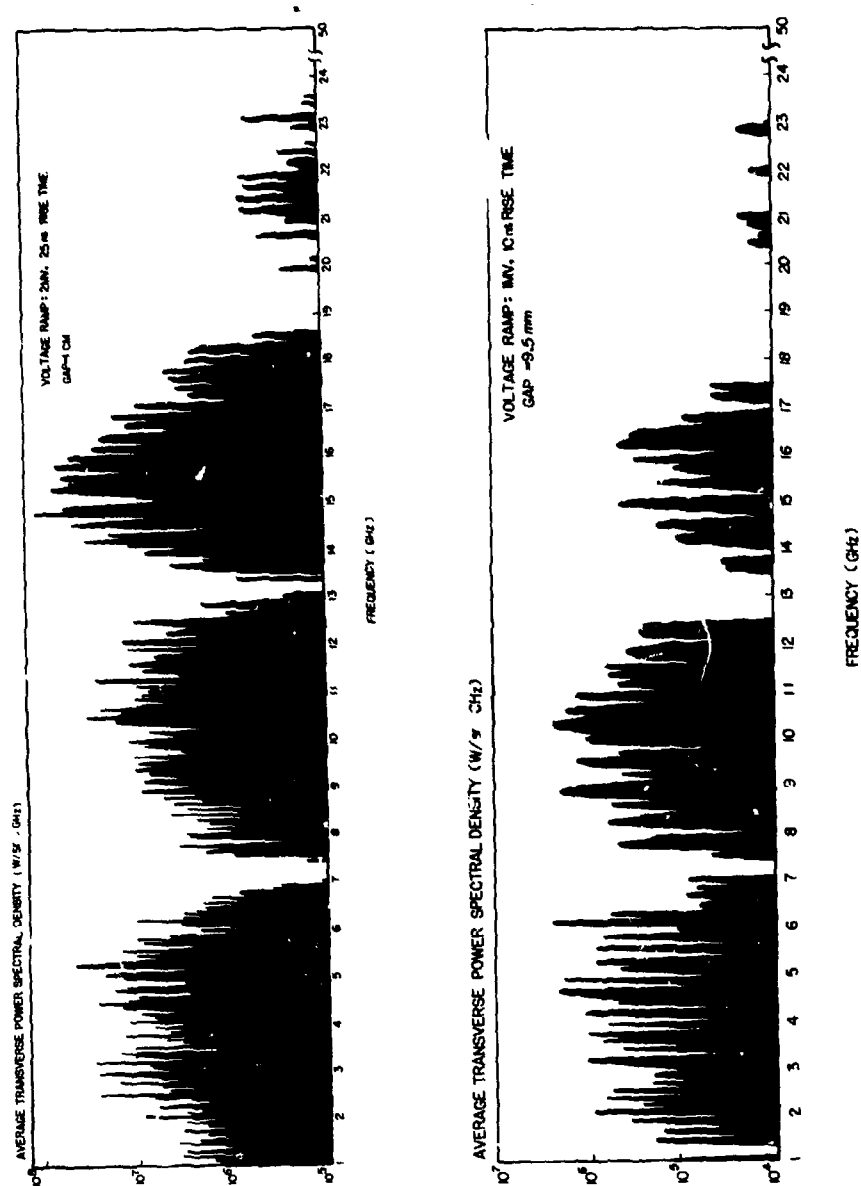calculated current density of the space charge cloud. An important

343

Figure 4. Calculated Microwave Spectra from a One-Dimensional Reflex Triode Computer Simulation

*KEHS, BRANDT, BROMBORSKY and
LASCHE

consequence of this treatment is an interference form factor for the oscillating space charge cloud geometry with zeroes in the region of interest (7.2 and 13.2 GHz).

Discussion

Figure 4 shows two calculated average power spectra for typical experimental parameters. On the upper plot, the predicted average power in the X-band is approximately 50 MW. This prediction compares favorably with experimental shots during which a high (several kilogauss) magnetic field was applied along the axis of the triode and confirms the validity of the model in that parameter regime. The high magnetic field confines particle movement to the one-dimensional motion seen in the computer simulations. The lower plot shows the computed radiation spectrum that would be expected if a larger (higher peak and longer rise time) pulse were applied across the anode-cathode gap. The power output is seen to be sensitive to changes in the size of the applied voltage pulse, which (in our machine) typically varies by 5 to 10%. Such variations can at most account for power outputs of 100 to 150 MW, while peaks as high as 3 GW have been recorded experimentally.

For all shots on which more than 200 MW of peak power was measured, the applied field was less than 500G. At these low magnetic field levels, the electron motion is no longer constrained to one dimension and the system may allow multi-dimensional motion and bunching effects which would influence the production of gigawatt peak power microwave pulses. To better understand and exploit these effects, a fully relativistic, time dependent, $2\frac{1}{2}$ - dimensional superparticle simulation code is being prepared and should be operational by mid 1980. It is hoped that a more sophisticated model of triode operation will be constructed that will predict the production of higher peak and average output powers with a substantial increase in efficiency (presently 5%). Already, 30% efficiency at gigawatt power levels in S-band has been achieved with a triode at the Tomsk Polytechnical Institute in the Soviet Union.[8]

Near term experiments will attempt to operate without a physical anode foil, to match the impedance of the triode to the electron beam generator, and to carefully map the dependence of the microwave radiation on the applied magnetic field. Long term goals will concentrate on using the results of our simulation effort to improve our understanding of the reflex triode and to increase its radiation output.

345

*KEHS, BRANDT, BROMBORSKY and
LASCHE

Microwave Devices and Applications

Table I lists the values of various parameters associated with the reflex triode and allows comparison with values from two other experimental devices that have produced gigawatt power levels of microwave radiation. The magnetron is an attractive device, but the small size required for microwave operation limits the voltage and the current that can be applied and therefore the power that can be extracted. The pulsed Gyrotron is a large, inefficient experiment that requires (in its present form) a huge electron beam generator which would prohibit practical use on the battlefield. However, the reflex triode requires only a modest electron beam source, and optimization should be able to increase both its output and its efficiency.

Table I

Parameters for Ultrahigh Power Microwave Generating Experiments

Parameter	Magnetron[9,10]	Gyrotron[11]	Reflex Triode[6]
Accelerating potential	360 kV	3.3 MV	1 MV
Beam current	12 kA	80 kA	20 kA
Pulse length	30 nsec	70 nsec	20 ns
Axial field	8 kG	10 kG	75 G
Power out	1 GW	1 GW	1 GW
Frequency	S-band	X-band	X-band
Efficiency	35%	0.4%	5%

To place a device like the reflex triode experiment in a proper practical perspective, it is necessary to consider its actual use on the battlefield. Historically, one of the weakest links preventing exploitation of these ultrahigh power microwave sources has been the electron beam generators. However, capabilities for producing intense relativistic electron beams have also increased dramatically over the last several years.[12,13] Although most of the industry's attention has been devoted to the superhigh power generators like the (10 MV, 1 MA) AURORA and the (1.5 MV, 4.5 MA) Proto II facilities, a great deal of work has been done on improving reliability, reproducibility, and the repetition rate of the smaller (0.25 MV, 5 to 30 kA) machines.

At the Sandia Laboratories, an electron beam machine has been designed[14] to deliver 350 kV, 30 kA, 30 nsec pulses at a continuous rate of 100 per second. The machine has actually operated in this

mode for several minutes without suffering any type of breakdown.
Improved versions of this machine have delivered voltages as high as
1 MV to diodes on a sustained repetition rate basis. Any of the
Sandia repetition rate machines would easily fit on a flatbed
trailer, and with some minor component redesign, they could probably
be squeezed onto a pickup truck. In short, these machines are on the
verge of becoming exceptionally transportable. With such electron
beam generators already being developed, practical use of the
ultrahigh power microwave generation schemes is already becoming
possible.

There are four major areas where microwaves find use on the
battlefield: communications, radars, electronic warfare, and
directed energy weapons.

In communications applications, high power means longer ranges,
better signal to noise ratios, and immunity to jamming and
interference. Practical monopulse radars could be developed to cover
problem-situations in which the transmitter must remain hidden or the
target must be acquired rapidly and there is no time to process
multiple pulses. These sources are useful not only as jammers, but
also as simulators of enemy jamming equipment. Finally, the outputs
of these devices are reaching levels where they can be considered as
directed energy weapons.

Conclusion

Although several laboratory experiments have demonstrated the
capability of generating gigawatt power levels of microwave
radiation, the Army's work on the reflex triode has established it as
the clear front-runner in the race to put practical ultrahigh power
microwave sources on the battlefield in the 1980's. We should be
ready to incorporate these new sources into our defense technology,
and we should be prepared for the problems that these devices can
cause when they are used against us.

*KEHS, BRANDT, BROMBORSKY and
LASCHE

References

1. D. A. Hammer et al, Microwave Production with Intense
Relativistic Electron Beams, Annals of the New York Academy of
Sciences, Vol. 251, 1975.

2. S. Humphries, Jr., J. J. Lee, & R. N. Sudan, Advances in the
Efficient Generation of Intense Pulsed Proton Beams, Laboratory of
Plasma Studies, Cornell University, LPS154, Aug 1974.

3. S. Humphries, Jr., R. N. Sudan, & W. C. Condit, Jr., The
Production of Intense Megavolt Ion Beams with a Vacuum Reflex
Discharge, Laboratory of Plasma Studies, Cornell University, LPS 161,
Jan 1975.

4. H. F. Brandt, A. Bromborsky, H. B. Bruns, & R. A. Kehs, Microwave
Generation in the Reflex Triode, Proc. of the 2nd Int. Topical Conf.
on High Power Electron & Ion Beam Research & Technology, Oct 1977.

5. H. Barkhausen & K. Kurz, Shortest Waves Obtainable with Valve
Generators, Phys. Zeit., Vol. 21, Jan 1920.

6. H. E. Brandt, A. Bromborsky, H. B. Bruns, R. A. Kehs, & G. P.
Lasche, Gigawatt Microwave Emission from a Relativistic Reflex
Triode, Harry Diamond Laboratories, HDL-TR-1917, 1980.

7. C. K. Birdsall & W. B. Bridges, Electron Dynamics of Diode
Regions, Academic Press, New York, 1966.

8. A. N. Didenko, Y. Y. Krasik, S. F. Perelygin, G. P. Fomenko,
Pis'ma Sh Teknichesky Fiziki, Vol. 5, No. 6, 1979.

9. G. Bekefi & T. J. Orzechowski, Giant Microwave Bursts Emitted
from a Field-Emission, Relativistic-Electron-Beam Magnetron, Phys.
Rev. Letters, Vol. 37, No. 6, 9 Aug 1976.

10. A. Palevsky & G. Bekefi, Microwave Emission from Pulsed
Relativistic E-Beam Diodes. II. The Multiresonator Magnetron, Phys.
Fluids, Vol. 22 (S), May 1979.

11. V. L. Granatstein, M. Herndon, P. Sprangle, Y. Carmel, & J. A.
Nation, Gigawatt Microwave Emission from an Intense Relativistic
Electron Beam, Plasma Physics, Vol. 17, 1975.

12. H. H. Fleischmann, High-Current Electron Beams, Physics Today,
May, 1975.

13.   J. A. Nation, High Power Electron & Ion Beam Generation,
Particle Accelerators, Vol. 10, No. 1, 1979.

14.   G. J. Rohwein, M. T. Buttram & K. R. Prestwich, Design and
Development of a 350 kV, 100 pps Electron Beam Accelerator, Proc. of
the 2nd Jnt. Topical Conf. on High Power Electron & Ion Beam Research
& Technology, Oct 1977.

(377)